


INITIAL SETUP GUIDE

Models: SECON-2000SM, SECON-MYCRO, SECON-2400SM

Upon initial receipt of your equipment, first check that your shipment has arrived intact. Please note any physical damages to the shipping box and/or equipment. Any such damages should be reported immediately so that a shipping claim can be made.

Package contents (not including any upgrades) are as follows:

- 1) Sewer Camera Reel with Camera Head Installed
- 2) Control Box (Mounted to Reel Side – DO NOT ATTEMPT TO REMOVE)
 - a) Main Controller Panel
 - b) Power Supply
 - c) 7" Color LCD with Remote

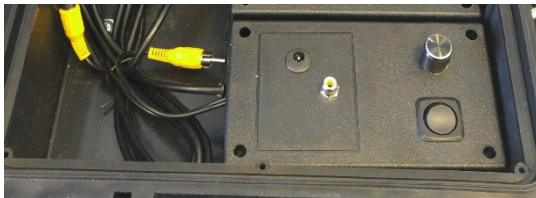

Equipment check & basic startup instructions:

- 1) Plug Power Supply into 110v-240v AC wall receptacle
- 2) Check that a Yellow RCA plug is routed to the "video out" jack on the top of your controller
- 3) Make sure that your "Sonde" switch is in the "off" position
- 4) Power on the system by turning the "power" switch to the "on" position
 - a) If the LCD does not turn on automatically, press the power button on the LCD
 - b) If the LCD begins with a Blue Screen, Change the LCD input (V1/V2) in the LCD Menu
 - c) If the LCD still shows blue screen, double-check that the sonde switch is in the off position